

NEUSTAR GRAVEL BOXES

SMOOTH SIDE-WALL GRAVEL BOX

Hardox In My Body® certified, with a clean outer sidewall, no cross members underneath the box and solid seam welds throughout.



The NeuStar Smooth Side-Wall Gravel Box is Hardox In My Body® certified — assurance that it is built to standard using genuine Hardox® wear plate. Hardox 500 Tuf runs the floor, doghouse and tailgate liner, there are no cross members underneath the box, and solid seam welds inside the box and on the sills deliver superior clean-out, no floor washboarding and improved durability.

Hardox In My Body® certified

Built with genuine Hardox® wear plate by a qualified member of SSAB's certification program.

Solid seam welds

Solid seam welded inside the box and on the sills rather than stitch welded, for a stronger, more durable surface.

No cross members underneath

A smooth underside with no cross members — superior clean-out and no floor washboarding.

Solid tube rear bumper

A solid tube bumper across the rear of the body for superior structural strength.

12'-24'

LENGTH

96"

WIDTH

18"-60"

SIDEWALLS

4.5mm


FLOOR & DOGHOUSE

500 Tuf

HARDOX FLOOR & GATE

BODY SPECIFICATIONS

NeuStar Smooth Side-Wall Gravel Box

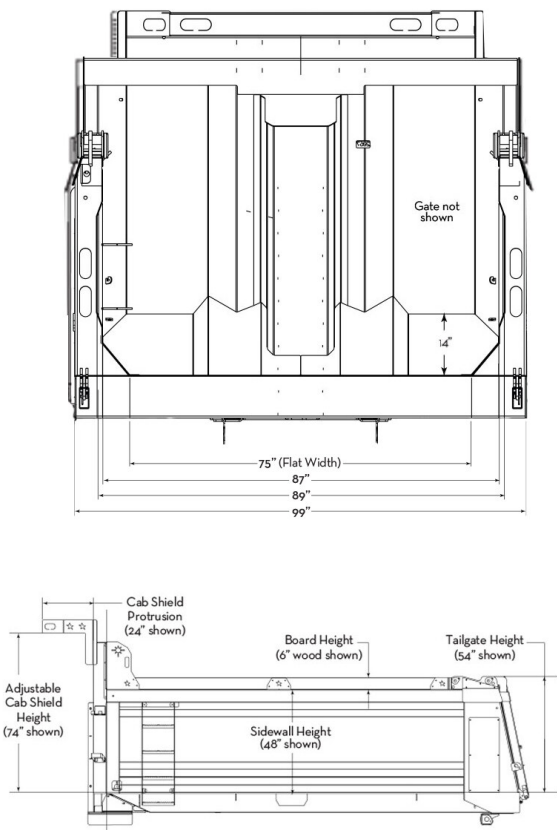

Representative dimensional drawing. Sidewall, board, tailgate and cab-shield heights shown are one configuration — yours is built to order.

SIZING & CONFIGURATION

Length	12'–24'
Width	96"
Sidewalls	36" std, 18"–60" avail.
Side boards	12" spruce
Wall height	48" (36" + 12")
Front wall	60", 10 gauge
Tailgate	48" three piece, to 60"
Gate liner	4.5mm Hardox 500 Tuf
Floor & doghouse	4.5mm Hardox 500 Tuf

BODY & STRUCTURE

- 36" Hardox single-wall sidewalls with a clean, smooth outer face. Sidewalls available 18"–60".
- 12" spruce side boards — standard wall height 48" (36" sidewall plus 12" board).
- 60" front wall, 10 gauge, with cab shield.
- 4.5mm Hardox 500 Tuf floor and doghouse. Smooth underside — no cross members.
- Built in lengths from 12' to 24', 96" wide.
- Also available as a box only.

TAILGATE & REAR

- 48" three-piece tailgate, fully lined inside with 4.5mm Hardox 500 Tuf. Gates to 60" available.
- Solid tube rear bumper for superior structural strength.
- Rear driver's-side steps.

WELDS, FINISH & LIGHTING

- Solid seam welding inside the box and on the sills, rather than stitch welds.
- Sandblasted, polyurethane primed, then finished in Axalta Imron Elite paint.
- LED lighting on a sealed wire harness, with red oval stop / tail / turn and white oval backup lights.

Spec'ing a truck? Sidewall height, board height and tailgate style all change how the box loads and unloads. Petra sizes the body, hoist and chassis together so the finished unit is legal on your routes.

Body specifications only. **Hoist, hydraulics, controls, chassis equipment and options such as tarp systems, high-lift gates and heated floors are spec'd and quoted by Petra** to suit your truck — ask for a full build sheet.



Smooth Side-Wall Gravel Box shown mounted on a tandem chassis. Configuration shown may include optional equipment.

Build your Smooth Side-Wall with Petra.

Authorized NeuStar dealer with in-house installation, hydraulics and service. Call for a quote, a build sheet, or a look at what's on the floor.

(937) 419-0415

sales@petratruck.com
2151 S Vandemark Rd, Sidney, OH 45365
petratruck.com